




CREATE TO PERFECTION

微動開關顯示器(防爆型) LIMIT SWITCH BOX (Explosion-proof Type)

■ 型號: ES-300
Model



■ 尺寸圖 Dimensions

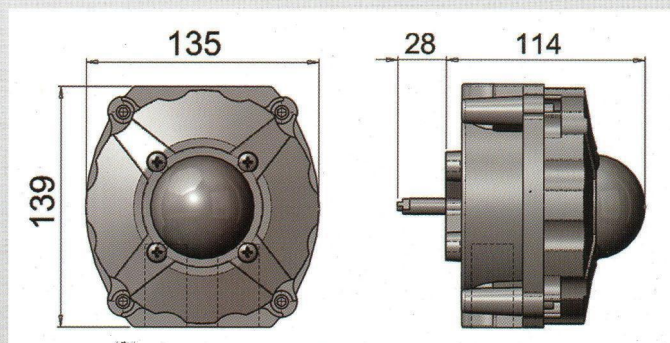

■ 參數表 Parameters Table


Item	ES-100	ES-300
Enclosure	Waterproof and Dust-proof IP67	IP67 , Explosion-proof Eexd II BT6
Terminals	10	
Position Indicator	0°-90° Rotary (Yellow-Open, Red-Close)	
Electrical Interface	1/2"NPT	PF3/4"
Ambient Temperature	-20~+70°C	
Mounting Brackets	VDI/VDE 3845 , NAMUR Standard , Stainless Steel	
Micro-switch	SPDT , SPST	

微動開關顯示器(非防爆型) LIMIE SWITCH BOX (None Explosion-proof Type)

■ 型號: ES-100
Model



■ 尺寸圖 Dimensions

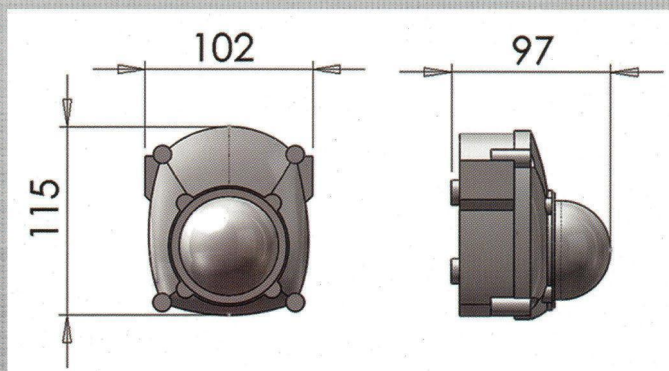

■ 參數表 Parameters Table

Item	ES-100	ES-300
Enclosure	Waterproof and Dust-proof IP67	IP67 , Explosion-proof Eexd II BT6
Terminals	10	
Position Indicator	0°-90° Rotary (Yellow-Open, Red-Close)	
Electrical Interface	1/2"NPT	PF3/4"
Ambient Temperature	-20~+70°C	
Mounting Brackets	VDI/VDE 3845 , NAMUR Standard , Stainless Steel	
Micro-switch	SPDT , SPST	




沅鴻貿易有限公司

台中市大肚區沙田路一段320巷50-2號3F
電話: 04-2693-3688, 2693-3690
傳真: 04-2693-3696
信箱: eaglesky@hibox.hinet.net
網址: www.eaglesky1286.com

EAGLESKY CO., LTD.

No. 50-2, Ln. 320, Sec. 1, Shatian Rd., Dadu Township, Taichung County, Taiwan
Tel: 886-4-26933688, 26933690
Fax: 886-4-26933696
E-mail: eaglesky@hibox.hinet.net
Website: www.eaglesky1286.com




CREATE TO PERFECTION

五口二位電磁閥 NAMUR SERIES SOLENOID VALVE

■ 型號: ES-4V
Model



■ 尺寸圖 Dimensions


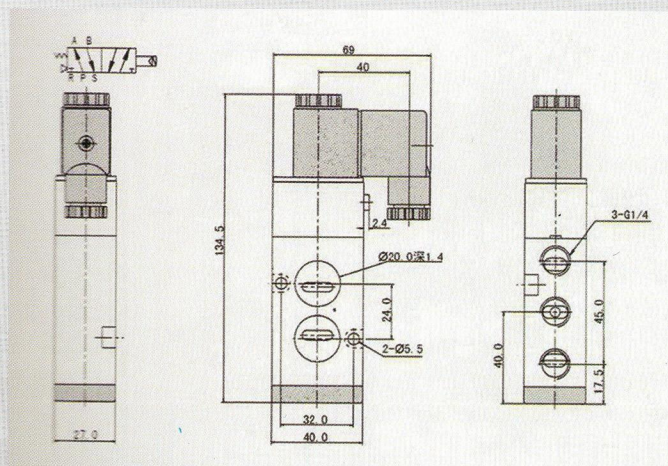


■ 參數表 Parameters Table

位置數The position counting	五口二位 Two-position Five-way	五口二位 Two-position Five-way
有效截面積Effective Section Area	25mm ² (CV=1.40)	30mm ² (CV=1.68)
接管口徑Joint Pipe Bore	進氣=出氣=排氣=G1/4" Air Inlet=Air Outlet=Exhaust=G1/4"	進氣=出氣=G3/8" 排氣=G1/4" Air Inlet=Air Outlet=G3/8" Exhaust=G1/4"
工作介質Working Medium	經40微米過濾的空氣/40 Micron Filtered Air	
動作方式Motion Pattern	內部先導式 / Inner Guide Type	
使用壓力Working-pressure	0.15~0.8MPa	
最大耐壓力Max. Pressure Resistance	1.2MPa	
工作溫度Operating Temperature	5~50	
電壓範圍Voltage Range	±10%	
耗電量Power Consumption	AC:5.5VA DC:4.8W	
絕緣性及防護等級Insulation & Protection Class	F級: IP65 / F Class: IP65	
接線形式Wiring Form	出線式或端子式 / Lead Wire or Connector type	
最高動作頻率Highest Action Frequency	每秒五次 / 5 Cycle / Sec	
最短勵磁時間Shortest Excitation Time	0.05秒 / 0.05 Second	

角行程氣缸用定位器 ELECTRO-PNEUMATIC POSITIONER(Rotary)

■ 型號: ES-1000R
Model

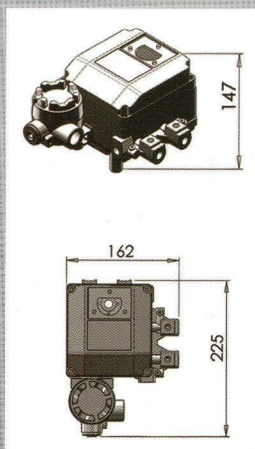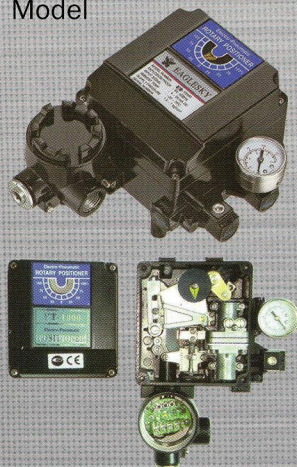

■ 參數表
Parameters Table

Item	Single-acting	Double-acting
Input Signal	4-20mA	
Impedance	250±15Ω	
Input Pressure	1.4~7Kgf/cm ²	
Travel Range	0-90°	
Air Connection	NPT1/4	
Gauge Connection	NPT1/8	
Power Interface	G 1/2	
Explosion Level	Ex d IIBT6	
Protection Level	IP66	
Ambient Temperature	-20°C~70°C	
Humidity	10~90RH	
Linear type	±1%F.S.	±2%F.S.
Hysteresis	1%F.S.	
Sensitivity	±0.2%F.S.	±0.5%F.S.
Repeatability	±0.5%F.S.	
Air consumption	2LPM(sup=1.4kgf/cm ²)	
Flow rate	80LPM(sup=1.4kgf/cm ²)	
Material	Die-cast aluminum	
Weight	2.8kg	

■ 尺寸圖
Dimensions



沅鴻貿易有限公司

台中市大肚區沙田路一段320巷50-2號3F
電話: 04-2693-3688, 2693-3690
傳真: 04-2693-3696
信箱: eaglesky@hibox.hinet.net
網址: www.eaglesky1286.com

EAGLESKY CO., LTD.

No. 50-2, Ln. 320, Sec. 1, Shatian Rd., Dadu Township, Taichung County, Taiwan
Tel: 886-4-26933688, 26933690
Fax: 886-4-26933696
E-mail: eaglesky@hibox.hinet.net
Website: www.eaglesky1286.com